

YIDA[®]

Yilong

HOMOGENEOUS PVC FLOORING



Sheet





© YD-5001



© YD-5002



© YD-5003




© YD-5004




© YD-5005



© YD-5006

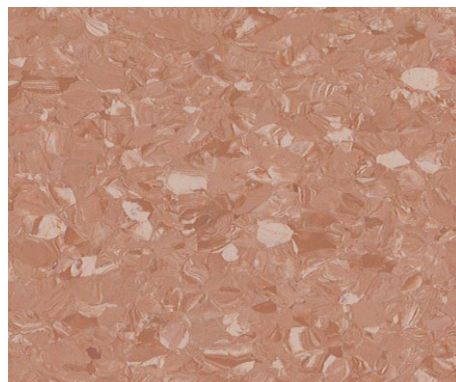

© YD-5007

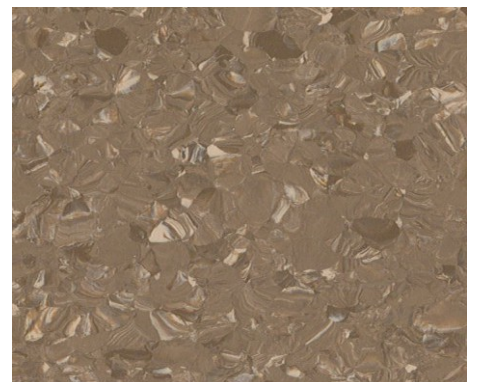


© YD-5008



© YD-5009




© YD-5010

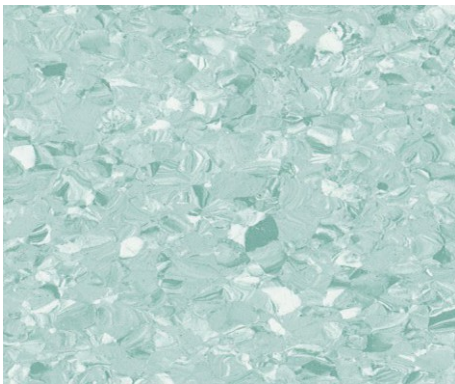

© YD-5011




© YD-5012

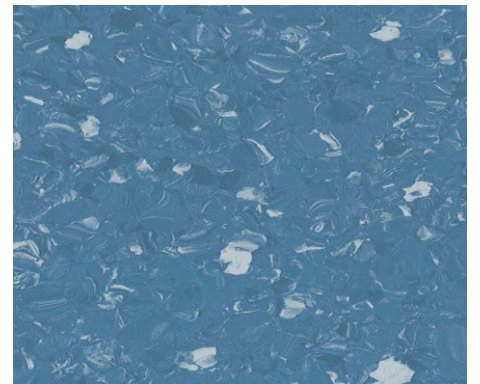

© YD-5013




© YD-5014

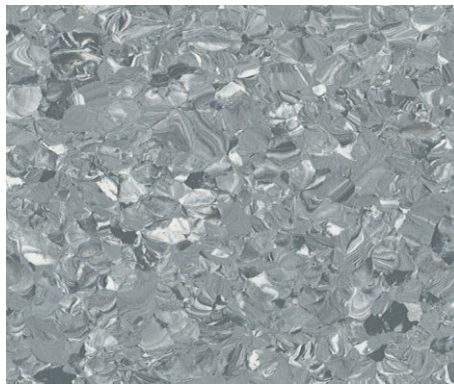


© YD-5015




© YD-5016

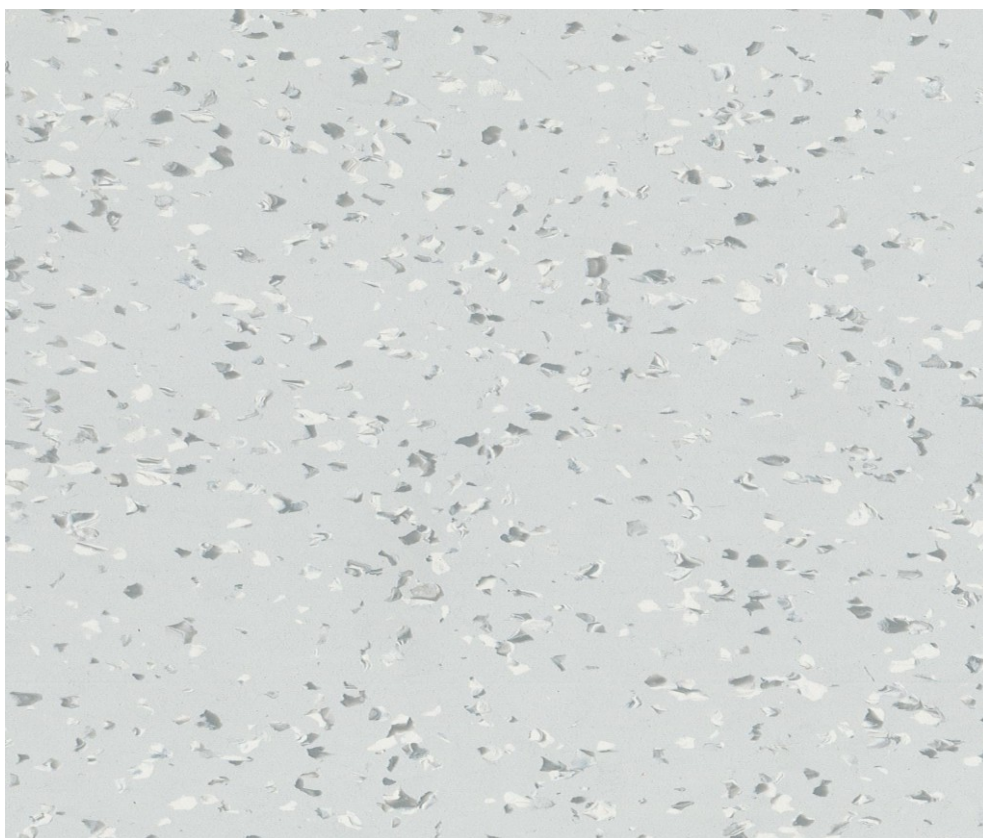


© YD-5017

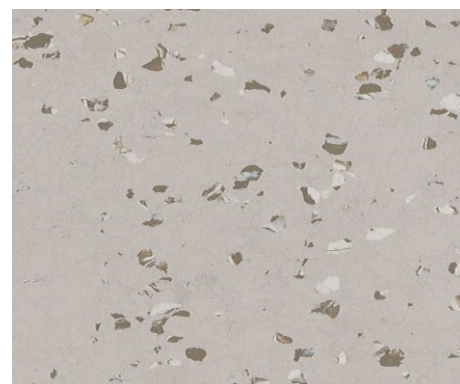


© YD-5018

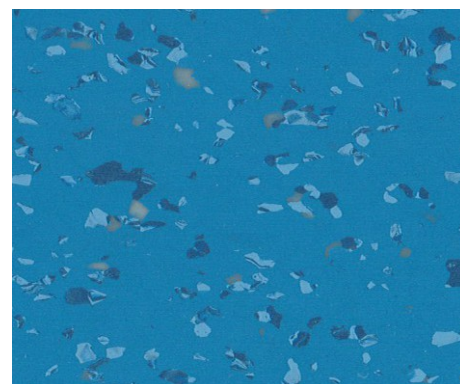


© YD-5019

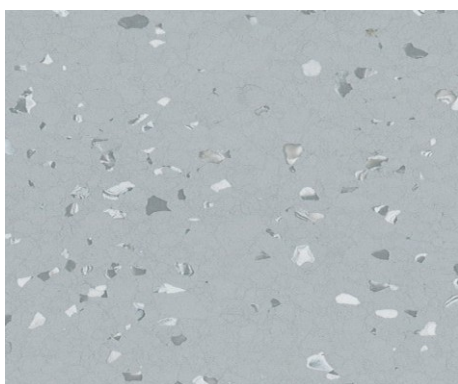

© YD-5020

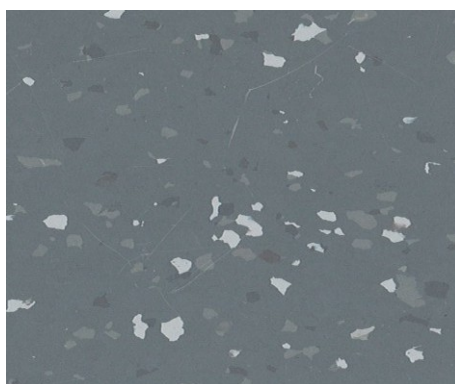

© YD-5021

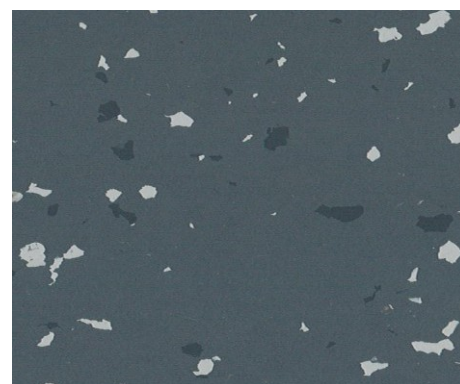

© YD-5022

FEWER VOC,S BETTER INDOOR AIR QUALITY



COMPOSITION

- 100%REACH compliant
- FREE of formaldehyd
- FREE of heavy metals
- FREE of solvent



RECYCLED CONTENT

- 100%REACH compliant recycle content



RECYCLABLE

- 100% recyclable product



INDOOR AIR QUALITY

- TVOC emissions 100 times lower than norm requirements(TVOC <math>< 10 \mu\text{g}/\text{m}^3</math> after 28 days)
- No formaldehyde emission



WELLNESS

- Antibacterial activity (inhibits growth>99%)




Adhering:

DOP free,heavy metal,VOC content is very low.

PUR PROTECT polyurethane ultraviolet light curing special maintenance treatment,high strength wear resistance, resistance to iodine,can avoid waxing, excellent cleaning performance

Plasticizer DOTP, excellent environmental performance

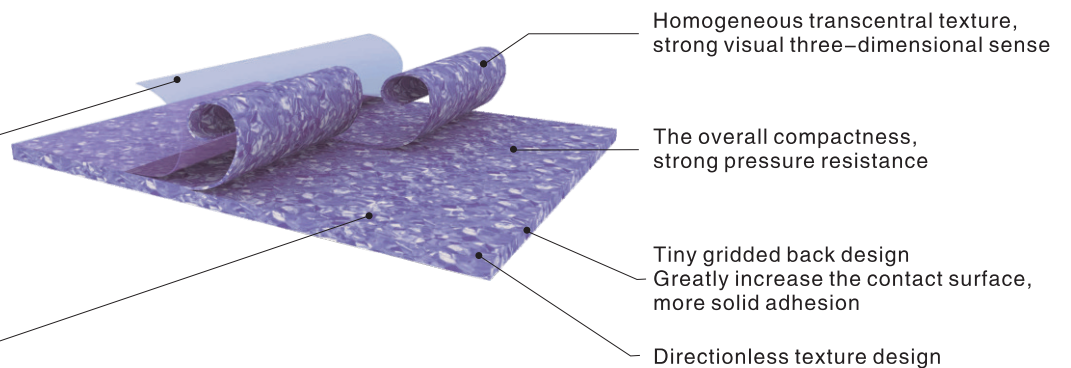

Product Specifications

Description	Standard	Unit	Result
Type of flooring	EN649		Homogeneous sheet
Total Thickness	EN428	mm	2.0
Width	EN426	m	2
Length Sheet	EN426	m	20
Classification			
Fire rating	GB 8624-2012		GB 8624 BI (B _{fl-s} 1)
Toxic testing	GB 18586-2001		Good
Electrical resistance	EN1081		> 10 ⁹⁻¹⁰
Slip resistance dry	EN13893		≥0.3
Slip resistance wet	EN 51 130		R9
Performances 性能			
Abrasion group	EN660-2		P-T
Castor wheel test	EN425		Suitable
Color fastness	EN 20 105-B02		6
Chemical products resistance	EN423		Good 好
Dimensional stability	EN434	%	≤0. 40
Flexibility	EN435		Excellent
Hygiene treatment	MRSA		Very good
Impact sound reduction	ENISO717/2		Approx.+4dB
Indentation	EN433	mm	≈0.05
Residual indentation	EN433	mm	Approx.0.04
Surface treatment			PUR



The DOP detected value is not detected



Standard heavy metals in children's toys were not detected



The detected value of formaldehyde release is 0



No high-risk carcinogens have been detected in the EU



Release quantity 28 days to detect 1/200 euro standard