

*YIDA*<sup>®</sup>

Yixin

**HOMOGENEOUS PVC FLOORING**

---



Sheet







© YD-2079 Capuccino



© YD-2078 Corn



© YD-2073 Vanilla



© YD-2072 Terracotta



© YD-2074 Pumkin



© YD-2071 Imperial Red



© YD-2080 Espresso



© YD-2059 Camel




© YD-2060 Sahara







© YD-2055 Oplate

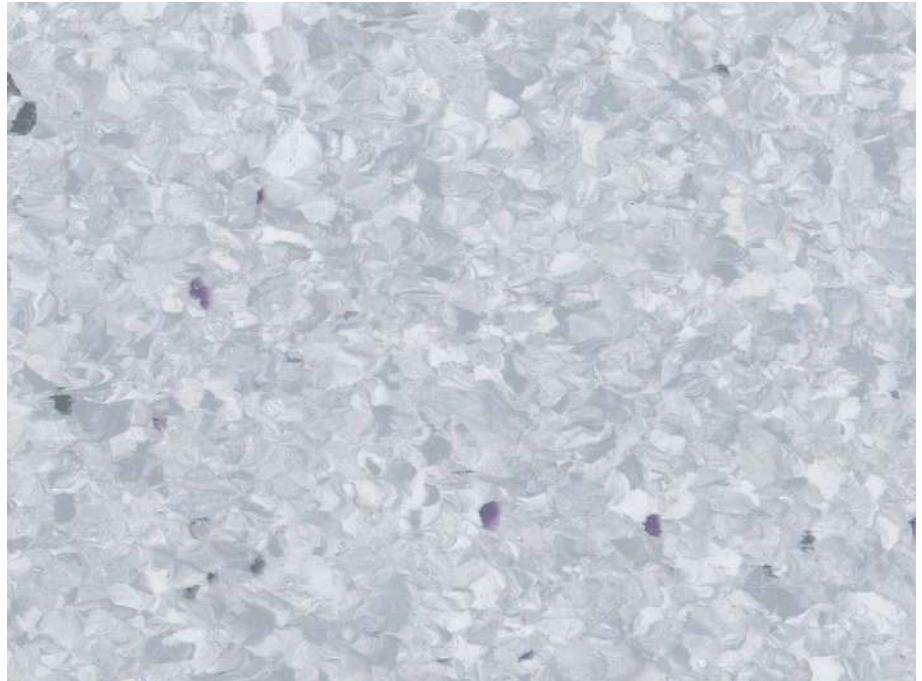

© YD-2053 Mouse



© YD-2054 Cloud



© YD-2056 Deer



© YD-2051 Charcoal



© YD-2052 Ash



© YD-2057 Coffee



© YD-2076 Storm



© YD-2050 Midnight







© YD-2062 Beach




© YD-2061 Sand



© YD-2084 Cream



© YD-2077 Latte

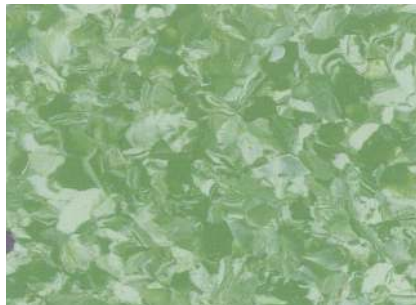

© YD-2065 Bamboo



© YD-2064 Hunting



© YD-2058 Fog



© YD-2063 Emerald




© YD-2066 Forest








© YD-2070 Blue

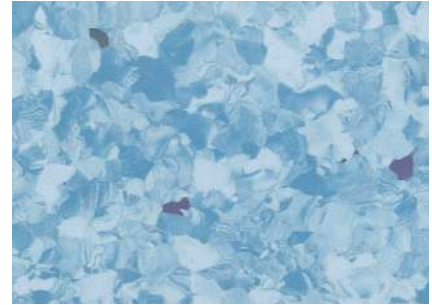

© YD-2069 Sky



© YD-2081 Cobalt

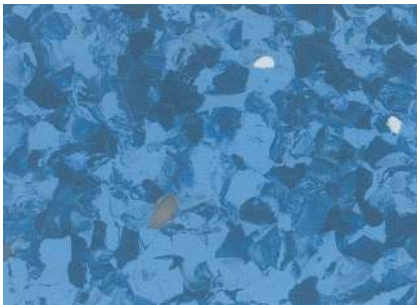

© YD-2067 Pool



© YD-2068 Sea Blue



© YD-2082 Ocean


*HOMOGENEOUS  
FLOORING*



© YD-2083 Candy



© YD-2075 Lavander

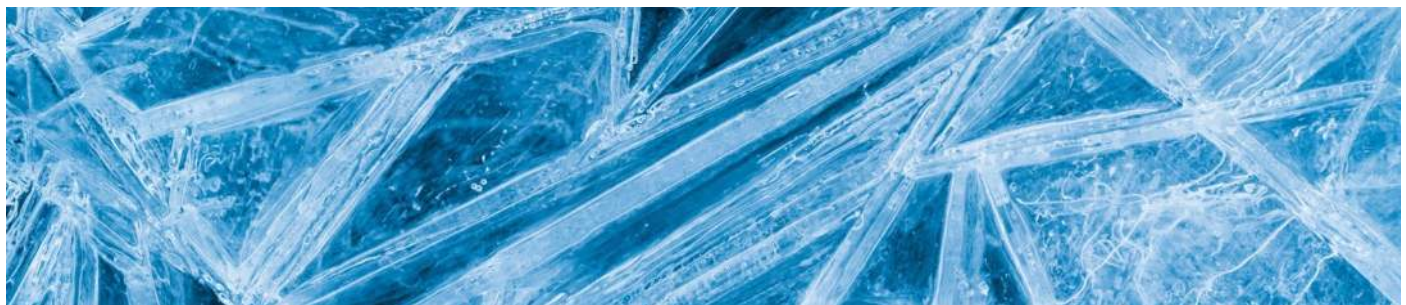





## PRODUCTS APPLICATION PLACES

Homogeneous core-penetrating elastic flooring, with flexible and diverse design choices, with high wear resistance, clean antibacterial, anti-pollution, health and environmental protection, easy to clean and maintain many excellent performance, it is widely used in high-traffic commercial and industrial fields, including medical institutions, old-age institutions, educational institutions, transportation places, office buildings, shopping malls, factories and so on.



kindergarten



Corridor channel



School kindergarten



Multi-function hall



Restaurant Lounge



Lobby



Office building



Library



Laboratory



Hospital

# FEWER VOC,S BETTER INDOOR AIR QUALITY



## COMPOSITION

- 100%REACH compliant
- FREE of formaldehyd
- FREE of heavy metals
- FREE of solvent



## RECYCLED CONTENT

- 100%REACH compliant recycle content



## RECYCLABLE

- 100% recyclable product



## INDOOR AIR QUALITY

- TVOC emissions 100 times lower than norm requirements(TVOC <math>< 10 \mu\text{g}/\text{m}^3</math> after 28 days)
- No formaldehyde emission



## WELLNESS

- Antibacterial activity (inhibits growth>99%)




### Adhering:

DOP free,heavy metal,VOC content is very low.

PUR PROTECT polyurethane ultraviolet light curing special maintenance treatment,high strength wear resistance, resistance to iodine,can avoid waxing, excellent cleaning performance

Plasticizer DOTP, excellent environmental performance

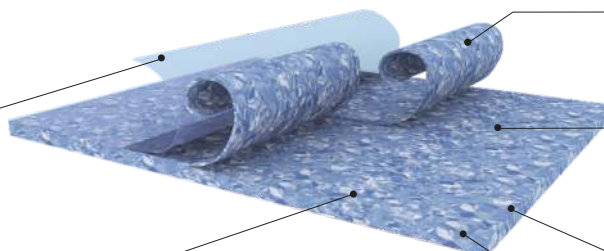

Homogeneous transcultural texture, strong visual three-dimensional sense

The overall compactness, strong pressure resistance

Tiny gridded back design Greatly increase the contact surface, more solid adhesion

Directionless texture design

## Product Specifications

Description	Standard	Unit	Result
Type of flooring	EN649		Homogeneous sheet
Total Thickness	EN428	mm	2.0
Width	EN426	m	2
Length Sheet	EN426	m	20
Classification			
Fire rating	GB 8624-2012		GB 8624 BI ( B <sub>fl-s1</sub> )
Toxic testing	GB 18586-2001		Good
Electrical resistance	EN1081		> 10 <sup>9-10</sup>
Slip resistance dry	EN13893		≥0.3
Slip resistance wet	EN 51 130		R9
Performances 性能			
Abrasion group	EN660-2		P-T
Castor wheel test	EN425		Suitable
Color fastness	EN 20 105-B02		6
Chemical products resistance	EN423		Good 好
Dimensional stability	EN434	%	≤0.40
Flexibility	EN435		Excellent
Hygiene treatment	MRSA		Very good
Impact sound reduction	ENISO717/2		Approx.+4dB
Indentation	EN433	mm	≈0.05
Residual indentation	EN433	mm	Approx.0.04
Surface treatment			PUR



The DQP detected value is not detected



Standard heavy metals in children's toys were not detected



The detected value of formaldehyde release is 0



No high-risk carcinogens have been detected in the EU



Release quantity 28 days to detect 1/200 euro standard