



HOMOGENEOUS PVC FLOORING

COSMOS



CS-2014



CS-2015




CS-2005



CS-2006



CS-2009

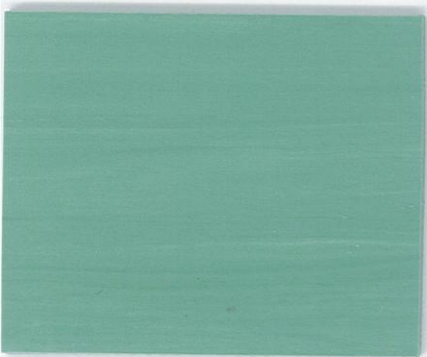

CS-2018



CS-2019



CS-2010

YIDA

COSMOS
HOMOGENEOUS FLOOR

♻️ 100% recyclable
Size: 2.0mm x 2m x 20m



Product Specifications

Description	Standard	Unit	Result
Type of flooring	EN 649		Homogeneous sheet
Total Thickness	EN 428	mm	2.0
Width	EN 426	m	2
Length Sheet	EN 426	m	20
Weight	EN 430	g/m ²	3300

Classification			
Fire rating	GB 8624-2012		GB 8624 B1(Bf1-s1)
Toxic testing	GB 18586-2001		Good
Electrical resistance	EN 1081		> 10 ⁹⁻¹⁰
Slip resistance dry	EN 13893		≥0.3
Slip resistance wet	EN 51 130		R9

Performances			
Castor wheel test	EN 425		Suitable
Color fastness	EN ISO 105-B02		≥6
Chemical products resistance	EN 423		Good
Dimensional stability	EN 434		≤0.40
Flexibility	EN 435	%	Excellent
Hygiene treatment	MRSA		Very good
Impact sound reduction	EN ISO 717/2		Approx.+4dB
Indentation	EN 433		≈0.05
Residual indentatin	EN 433	mm	Approx. 0.04
Surface treatment		mm	PUR

Products application places

Homogeneous core-penetrating elastic flooring,with flexible and diverse design choices,with high wear resistance, clean antibacterial, anti-pollition,health and environmental protection,easy to clean and maintain many excellent performance,it is widely used in high-traffic commercial and industrial fields,including medical institutions,old-age institutions,educational institutions,transportation places,office buildings, shopping malls,factories and so on.

